


DmxNode – 2/1

Product Sheet

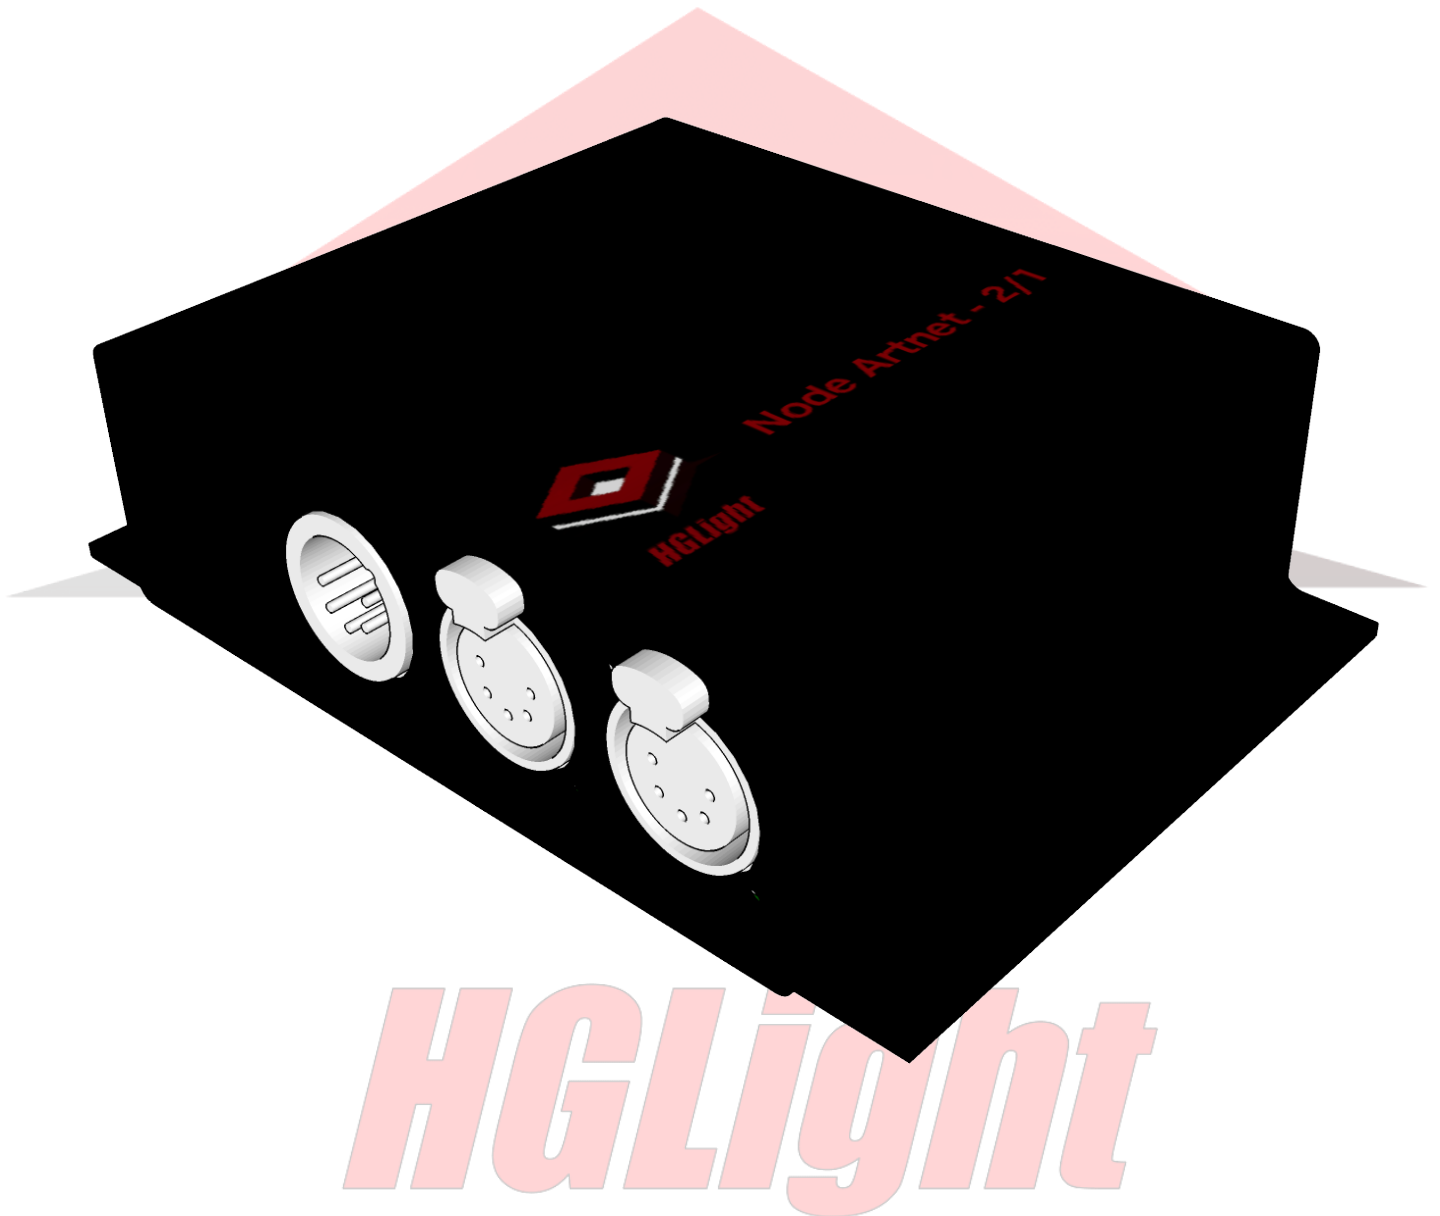

DmxNode – 2/1 has 2 outputs and 1 input DMX ports. It supports ArtNet and sACN protocols and can be configured with a web interface. It has many options, such as converting input to output, or using input and outputs simultaneously.


➤ Hardware :

- 3x DMX 5pin connectors (2xMC5FAH and 1x MC5MAH)
- 10/100Mb RJ45 Ethernet Interface
- Robust metal case
- 4x fixing holes
- Barrel DC power connector


➤ Features :

- Dual DMX outputs
- One DMX input
- Art-Net, sACN supports
- Unicast or Multicast inputs modes
- Web interface configurations

➤ Back view :

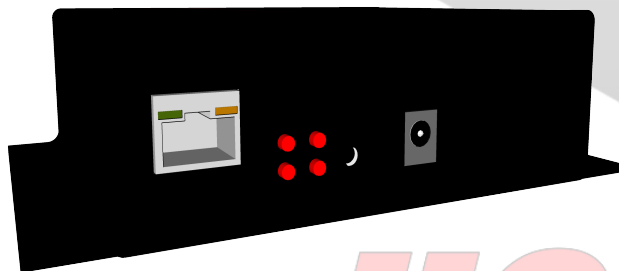

➤ Operation :

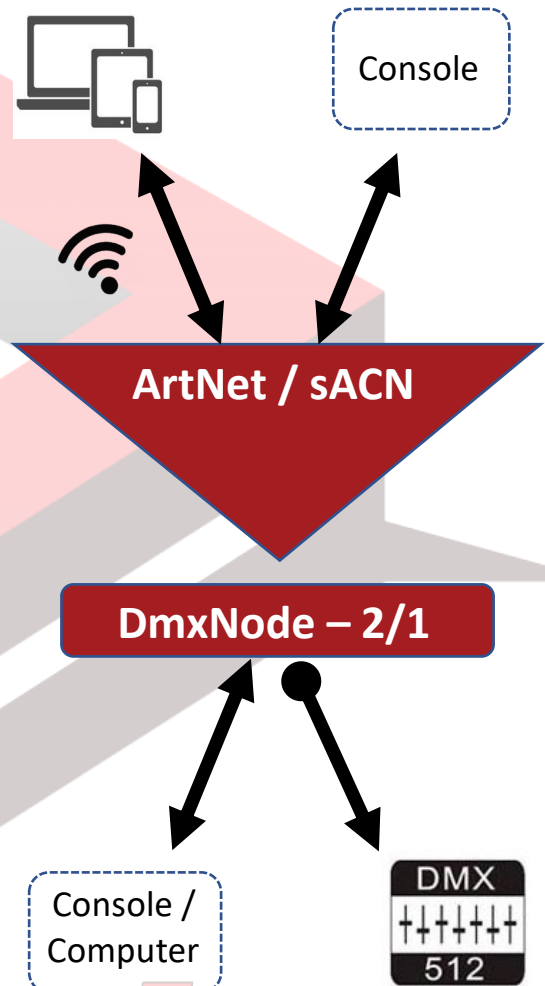

➤ Dimensions :

- 147mm Width
- 100mm Depth
- 41mm Height

➤ Web Interface Configurations :

HGLight Node Artnet-2/1 Config

Name : HGLNode2-1 Modify

Outputs Configurations

ArtNet
sACN

IP adress : 2 . 0 . 0 . 10 Modify

Subnet Out1 : 0

Universe Out1 : 1 Modify

Subnet Out2 : 0

Universe Out2 : 2 Modify

First Output On All : .

Inputs Configurations

OFF
ON
OUT 3

Send IP Adress : 2 . 0 . 0 . 2 Modify

Send Subnet : 0

Send Univere : 3 Modify