SimpleSound
Product Sheet

SimpleSound is a USB audio device with isolated balanced stereo outputs for connecting a computer to a sound system.

The device connects to the USB port of the computer and appears as the stereo output device.

SimpleSound provide ground isolation with a ground lift switch and the possibilitie to output stereo or mono signals.

HGLight

➢ Hardware :

- 2x XLR 3pin connectors (balanced)
- 1x USB Type B 2.0 connector
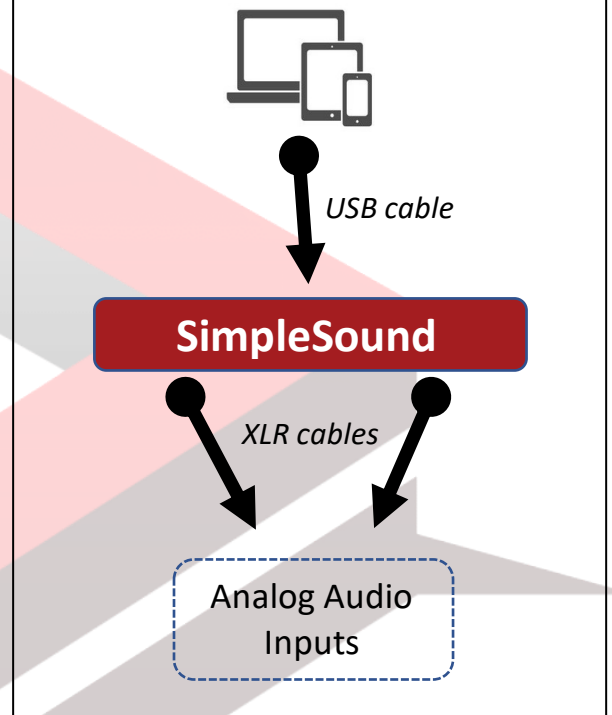- 2x DPDT Push switch
- Power LED indicator
- Robust metal case

➢ Features :

- USB Powered
- No driver needed (Windows, OSX, Linux)
- 44.1-48kHz, 16bit audio conversion
- Ground lift switch (isolated outputs)
- Mono / Stereo mode switch

➢ Back view :

OUT L/M   OUT R/M

➢ Operation :

USB cable

SimpleSound

XLR cables

Analog Audio
Inputs

➢ Dimensions :

- 70mm Width
- 70mm Depth
- 45mm Height

DISCLAIMER This brochure is for general marketing purposes only and should not be relied upon as being complete or accurate.